

5200 SERIES


B A R E S H A F T P U M P

The Jetstream® model 5200 waterblast pump is capable of power input of up to 400 horsepower (298 kW). It is the most advanced and efficient compact waterblast pump in the industry.

Combining the strength and durability of a proven power end workhorse with the unparalleled simplicity, serviceability and versatility of the UNx™ fluid end design, Jetstream bareshaft pumps are the best choice for those building their own system or replacing a complicated, worn, or unreliable pump.

KEY FEATURES

- Ductile iron power frame is the strongest in the industry
- Crankshaft machined from high-tech forged alloy for superior performance at higher power input
- Largest bearings of any comparable pump on the market

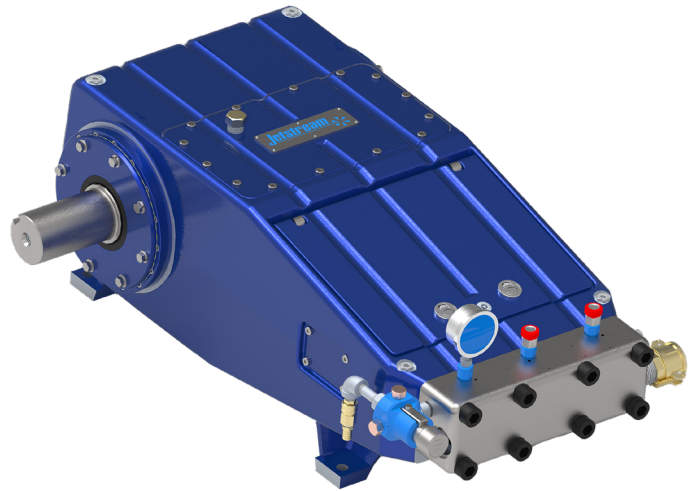

DESIGN	TRIPLEX (THREE PLUNGER)
MAX. POWER	400 HP (298 KW)
MAX. FLOW	62.1 GPM (235 LPM) AT 10,000 PSI (689 BAR)
DIMENSIONS L X W X H (in/mm)	53.7 (1365) X 34.3 (870) X 20.0 (508)
GEAR DRIVE	OPTIONAL

POWER END SPECS

PLUNGERS										PUMP OIL*			
NO.	STROKE		CONNECTION TYPE	PUMP SPEED RANGE	MAX. POWER INPUT		MAX. FRAME LOAD		TOTAL WEIGHT		TYPE	CAPACITY	
	in	mm		RPM	hp	kW	lb	kN	lb	kg		gal	l
3	5.25	133	DISCHARGE 15K: Jetstream HF 20K: 20K Port Female 40K: Jetstream 40K Port	183-518	400	300	17,750	79	2100	954	80W-90	9	34

* See manual for list of approved oils.

To order Jetstream parts and accessories, call (800) 231-8192 or visit www.waterblast.com

©2021 Jetstream of Houston, LLC. All rights reserved. UNx™ is a trademark of Federal Signal Corporation.



FLUID END SPECS

PLUNGERS				PUMP DISPLACEMENT AT SPECIFIED PUMP SPEEDS**														MAX OPERATING PRESSURE	
NO.	DIAMETER		MAX POWER INPUT		183 RPM		200 RPM		300 RPM		400 RPM		500 RPM		518 RPM				
	in	mm	hp	kw	gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm	psi	bar	
MODEL 5240																			
#7	.670	17.02	321	239	4.2	16	4.8	18	7.2	27	9.6	36	12.0	45	13.5	51	40,000	2758	
#8	.730	18.54	382	285	5.0	19	5.7	22	8.6	33	11.4	43	14.3	54	14.7	56			
#8HF	.790	20.10	400	300	5.9	22	6.7	25	10	38	13.4	51	16.7	63	17.2	65	36,000	2483	
#9	.865	22	400	300	7	27	8	30	12	45	16	61	20	76	20.7	78	30,000	2068	
MODEL 5220																			
#9	.900	22.86	290	216	7.5	28	8.7	33	13.0	49	17.4	66	21.7	82	22.4	85	20,000	1379	
#10	.980	24.89	344	256	8.9	34	10.3	39	15.4	58	20.6	78	25.7	97	26.5	100			
#11	1.062	26.97	400	300	10.5	40	12.1	46	18.1	69	24.2	92	30.2	114	31.1	118			
MODEL 5215																			
#11	1.100	27.94	325	242	11.2	42	13.0	49	19.4	73	25.9	98	32.4	122	33.6	127	15,000	1034	
#12	1.200	30.48	387	288	13.3	50	15.4	58	23.1	87	30.9	117	38.6	146	40.0	151			
#13	1.335	33.91	400	300	16.5	62	19.1	72	28.6	108	38.2	145	47.7	181	49.5	187	12,500	861	
#15	1.500	38.10	400	300	20.9	79	24.1	91	36.2	137	48.2	183	60.3	228	62.1	235	10,000	689	

**Flow values represented refer to "theoretical" flow, neglecting inefficiency resulting from compressibility of water and expansion of pressure bearing components.

OUR REACH



Jetstream Parts, Accessories and Rentals are also available through FS Solutions, with 13 convenient U.S. locations

Gonzales, LA
(225) 647-0660

LaPorte, TX
(281) 674-8668

Leeds, AL
(800) 822-8785

Salt Lake City, UT
(801) 808-4590

Highland, IN
(219) 924-3180

Streator, IL
(815) 672-6028

Long Beach, CA
(866) 515-9891

Lakewood, WA
(253) 584-0653

Williston, ND
(701) 572-7421

New Brunswick, NJ
(732) 448-7830

Toledo, OH
(888) 415-7368

Lexington, SC
(803) 996-0741

Midland, TX
(432) 563-4450



800.231.8192
sales@waterblast.com



www.waterblast.com



5905 Thomas Road
Houston, TX 77041