


GROUND HOG - HT1000SR

Self-Rotated 40,000 psi Mower with Speed Control

Self-rotating spray bar with speed control

No hydraulic or electrical power required

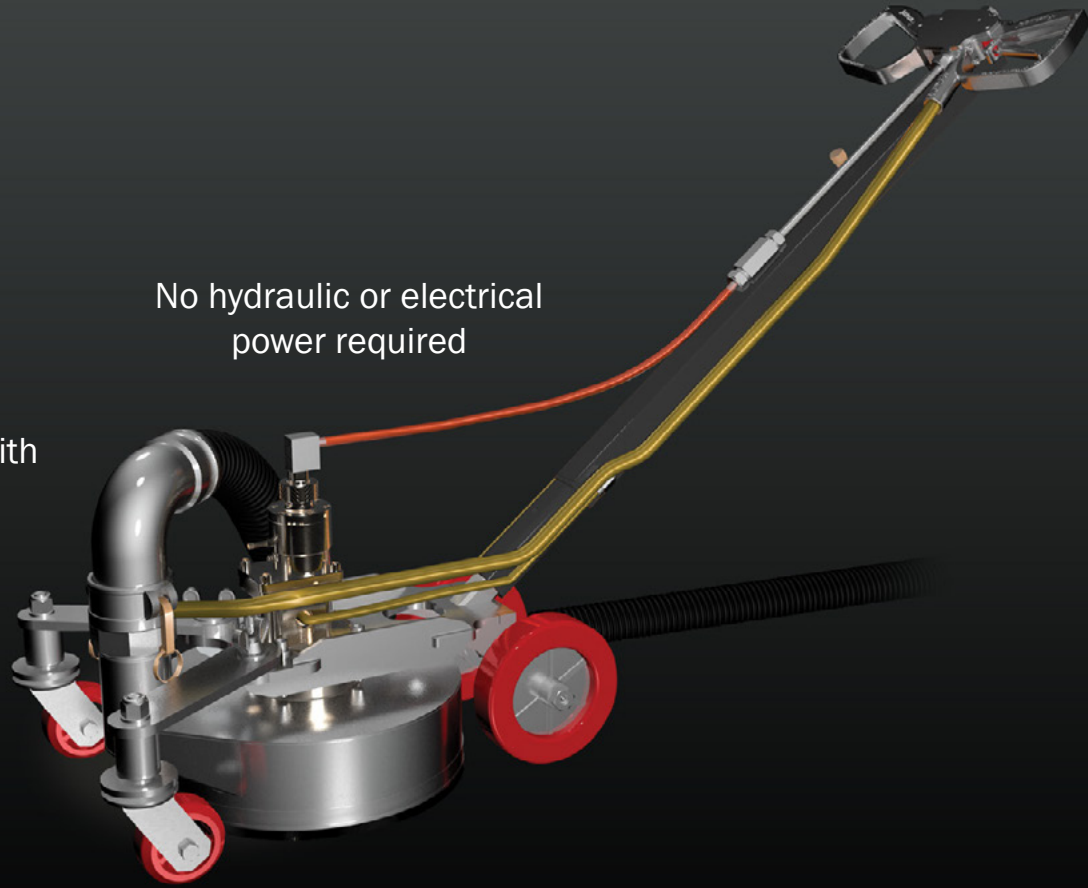

» Why To Buy «

- Powerful, lightweight and easy to transport
- Water pressure up to 40,000 psi
- 14" blaster head
- Solid shaft drive for spray bar speeds up to 2,500 rpm
- Easily manage spray bar speed from convenient, handle-mounted knob
- Machined angle-mounted sprayers reduce vibration
- Full vacuum recovery to contain water and debris
- Can work up to 300' away from your Stripe Hog Waterblasting System
- Rugged construction
- Contractor built and proven

» Applications «



**For the removal of surface coatings
such as paint, urethane, thermoplastic
and elastomeric**

Manufactured By:
**Waterblasting
Technologies**

1-772-214-1714 / www.waterblastingtechnologies.com

HT1000SR Advantages

- > Vacuum recovery makes it easy to see your work, maximizing productivity and minimizing negative impact to the surface
- > Hydraulic fluid flow precisely controls RPM's.
- > Lightweight and easy to transport

- > Machined spray angle eliminates vibration risks traditionally associated with self-rotating floor strippers
- > Easily replaceable brass seal and swivel tit
- > Available in either manual dump style or 12 volt remote control dump
- > Also available with positive hydraulic power

HT1000SR Specifications

| | |
|---------------------|---|
| Operating Pressure: | 40,000 psi |
| Flow Rate: | 6.5 - 9.2 gallons |
| Cutting Path: | 14" using up to a 15 nozzle spray bar configuration |
| Cleaning Capacity: | 500 - 1,500 ft ² /hr (46.5 - 139.4 m ² /hr) |
| Vacuum: | Demand 800 cfm |
| Construction: | Aluminum, Stainless and Steel |



Hydraulic needle valve precisely controls the rpm



Easily connects to any 40,000 psi pump



Lightweight and easy to transport



Proud seller of Waterblasting Technologies Tools

