


PIPE CLEANING NOZZLE

MAGDART

MAXIMUM POWER AND PERFORMANCE

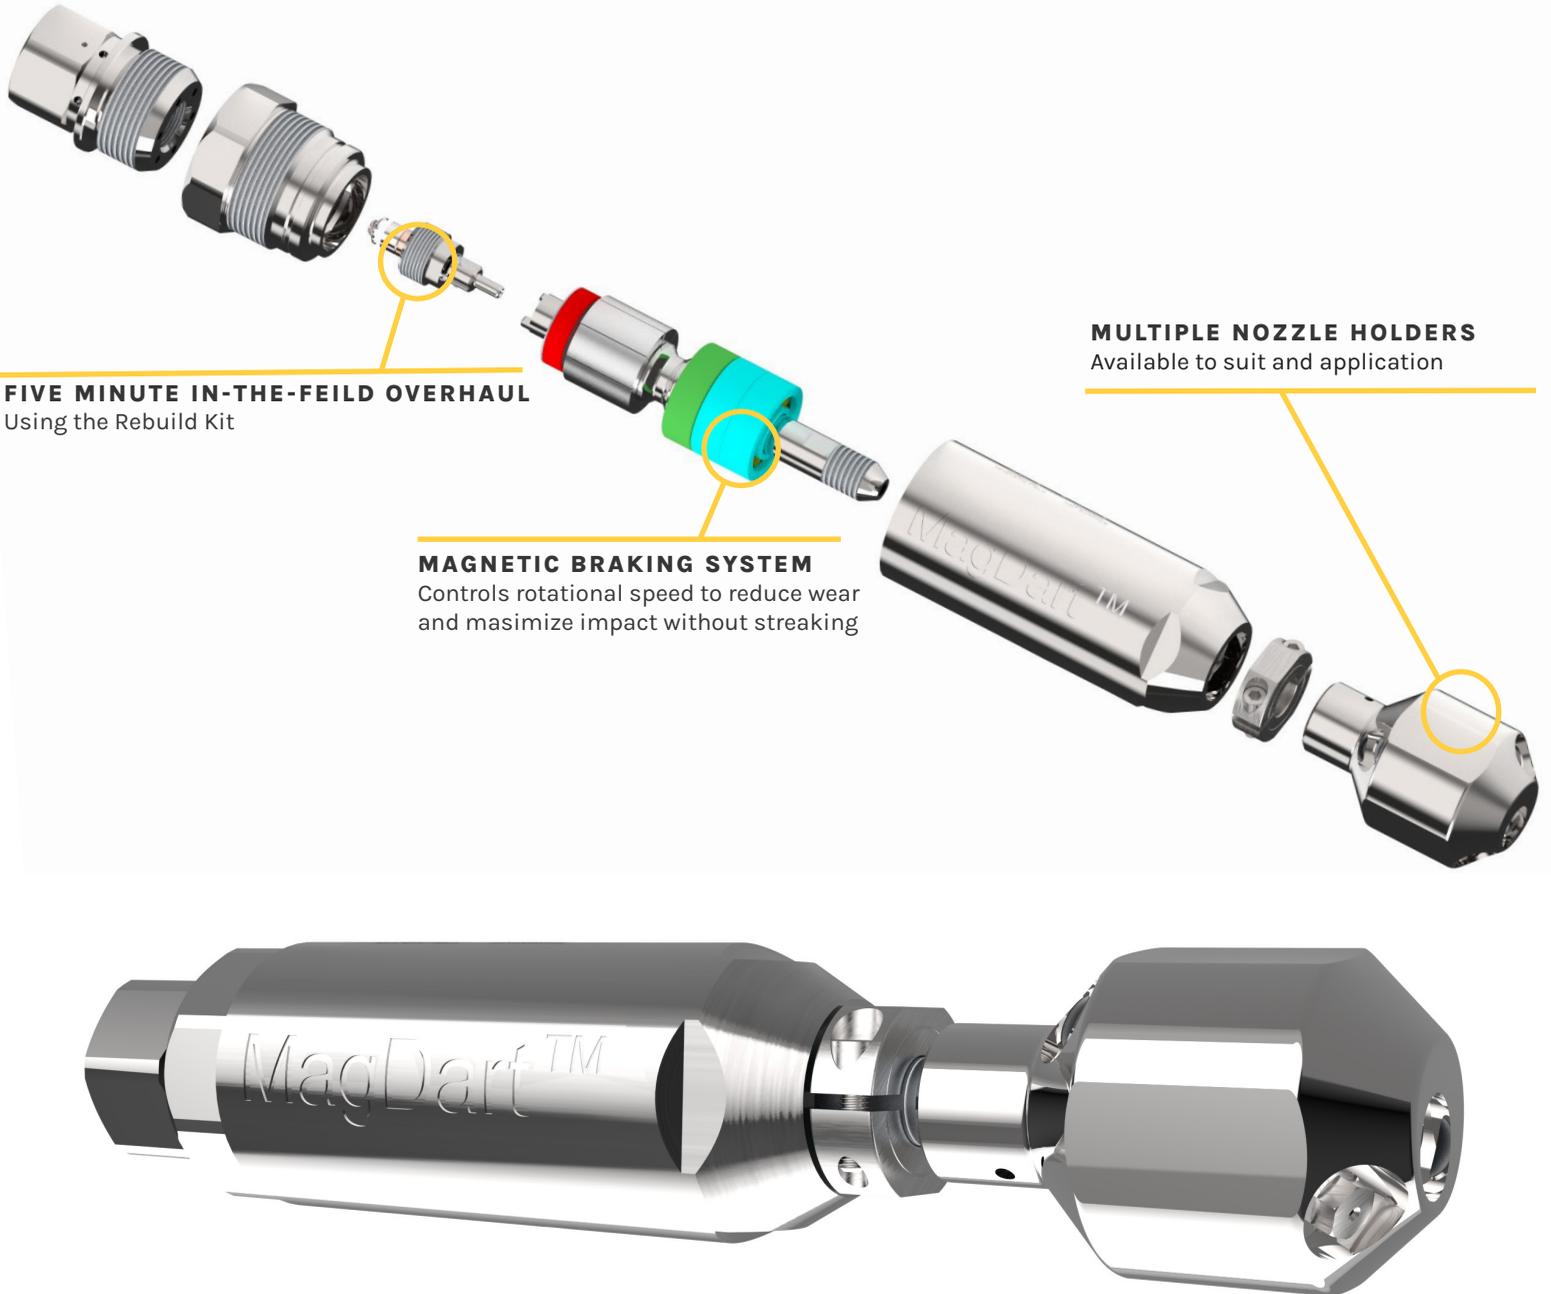


FIVE MINUTE IN-THE-FEILD OVERHAUL
Using the Rebuild Kit


MAGNETIC BRAKING SYSTEM
Controls rotational speed to reduce wear
and masimize impact without streaking

MULTIPLE NOZZLE HOLDERS
Available to suit and application

THE POLISHER

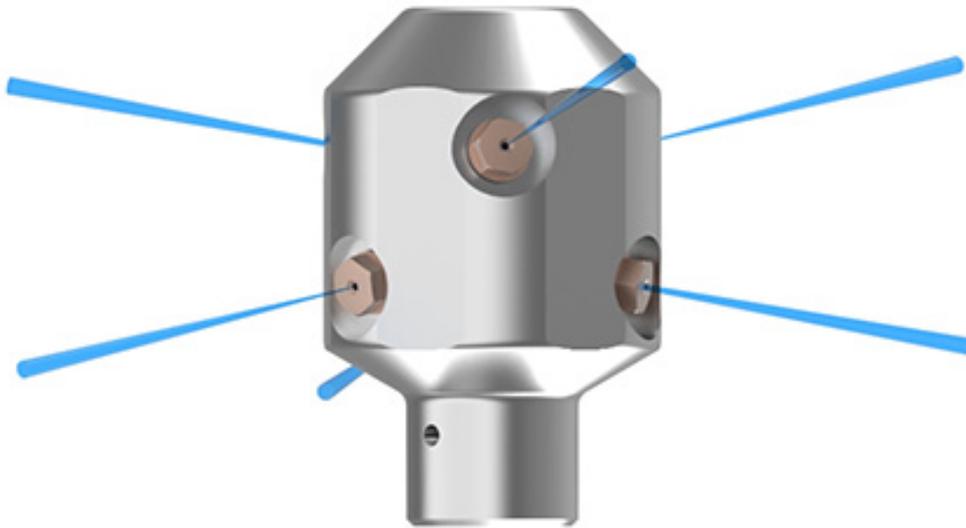

THE UNPLUGGER

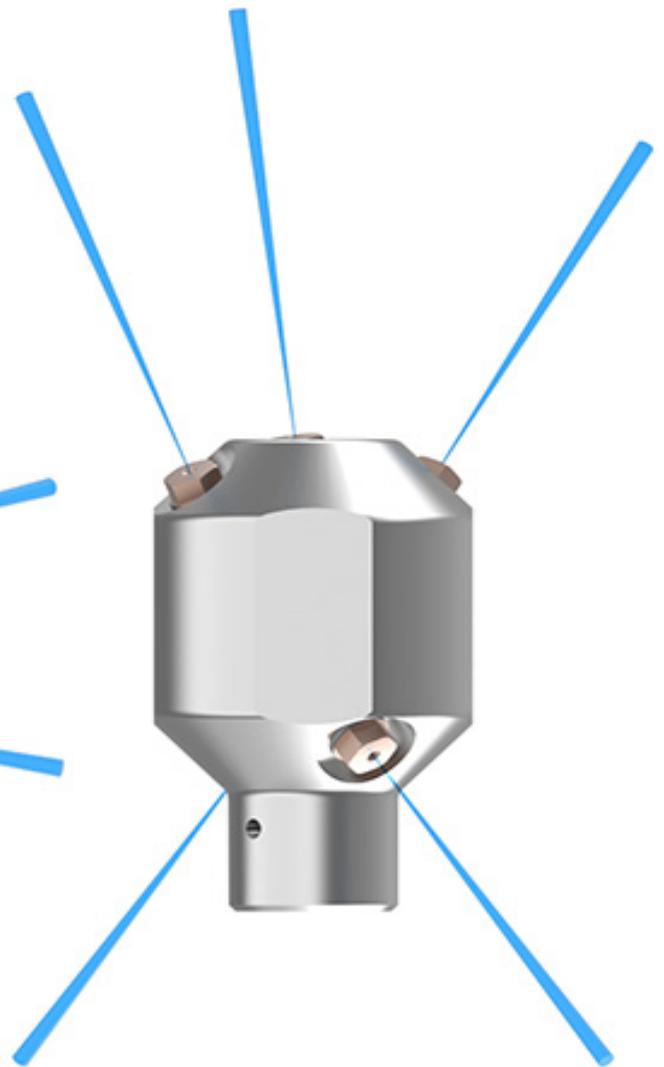

INLET CONNECTION	SPEED RANGE	DIAMETER		ASSEMBLY LENGTH		ASSEMBLY WEIGHT		MAX. FLOW RATE		MAX. OPERATING PRESSURE	
	RPM	IN	MM	IN	MM	LBS	KG	GPM	LPM	PSI	BAR
9/16" HP Female	200 - 800	2.0	51	9.9	251	6.0	13	12	45	43,500	3,000



SEE IT IN ACTION
MAGDART™

