


PIPE CLEANING NOZZLE

15K-20K
J-FORCE

POWERFUL PIPE CLEANING TOOLS

NEW MAGNET GUARD

Reduces downtime caused by magnetic debris build up

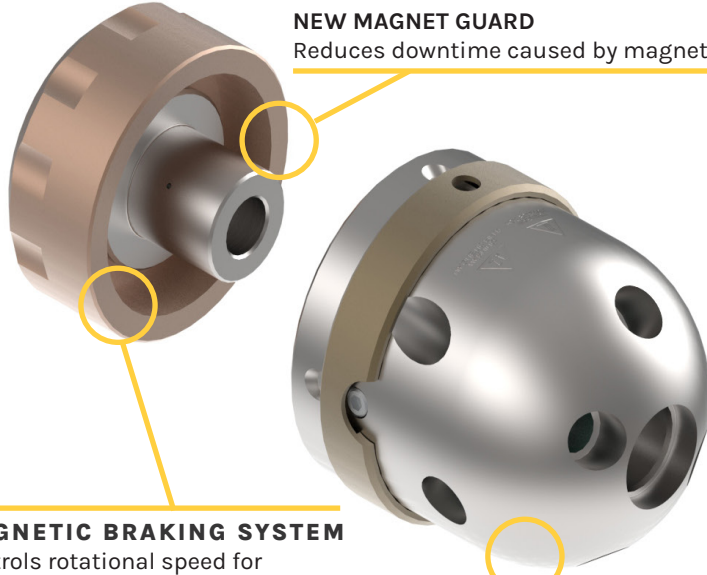

MAGNETIC BRAKING SYSTEM

Controls rotational speed for maximum cleaning and minimal wear. NO OIL OR FRICTION BRAKE!

TWO MINUTE IN-THE-FIELD OVERHAUL

Rebuild Kit provides easy in-field repair using standard wrenches. NO SPECIAL TOOLS REQUIRED!




WATER BEARING

Self-rotating tool spins on a water bearing. NO PHYSICAL BEARINGS NEEDED!



JET PATTERNS

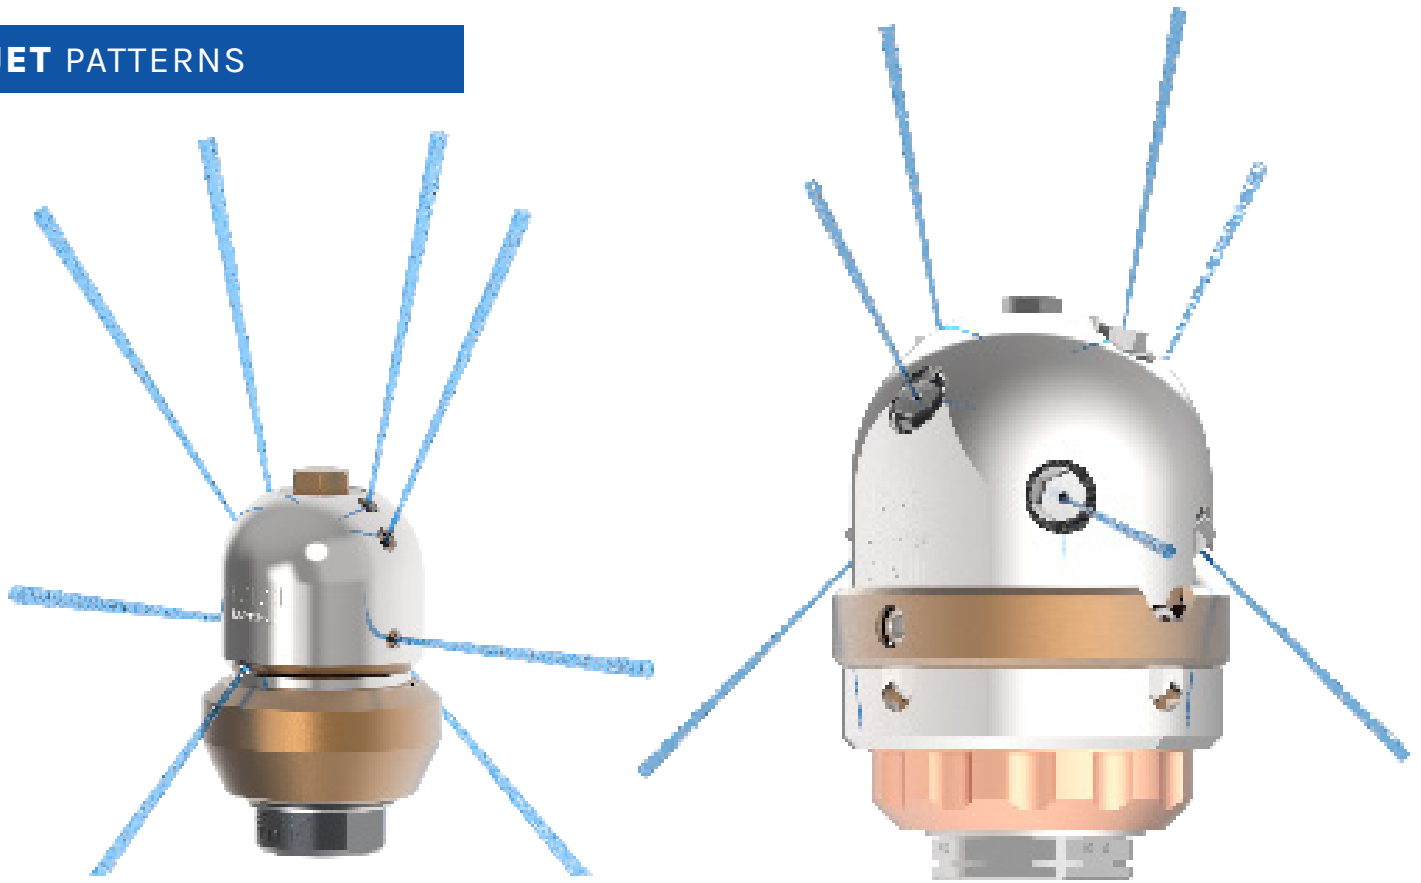


TOOL GENERATIONS	MODEL	INLET CONNECTIONS	SPEED RANGE	DIAMETER		ASSEMBLY LENGTH		ASSEMBLY WEIGHT		MAX. FLOW RATE		MAX. OPERATING PRESSURE	
				RPM	IN	MM	IN	MM	LBS	KG	GPM	LPM	PSI
2"	JF2X15	1/4" BSPP, 1/4" BSPP	1000-2000	1.36	35	2.02	51	.5	1.1	20	75	15,000	1034
	JF2X22	3/8" or 9/16" MP LH, RH										22,000	1516
3" Gen II	JF3X15	3/8" NPT	1000-2000	1.98	50	2.87	73	1.45	0.66	30	114	15,000	1034
	JF3X22	3/8" or 9/16" MP Tube LH, RH										22,000	1516
4" Gen IV	JF4X15	3/8" NPT	1000-2000	2.75	70	3.85	98	3.85	1.75	40	150	15,000	1034
	JF4X22	3/4" Type M, 9/16" MP LH, RH 1/2 BSPP Male, M24 Male										22,000	1516
6" Gen III	JF6X15	1/2" NPT	800-1000	3.75	95	5.34	136	11.0	5.0	60	226	15,000	1034
	JF6X22	M24, 9/16" MP										22,000	1516



SEE IT IN ACTION

J-FORCE

JetstreamRentals 

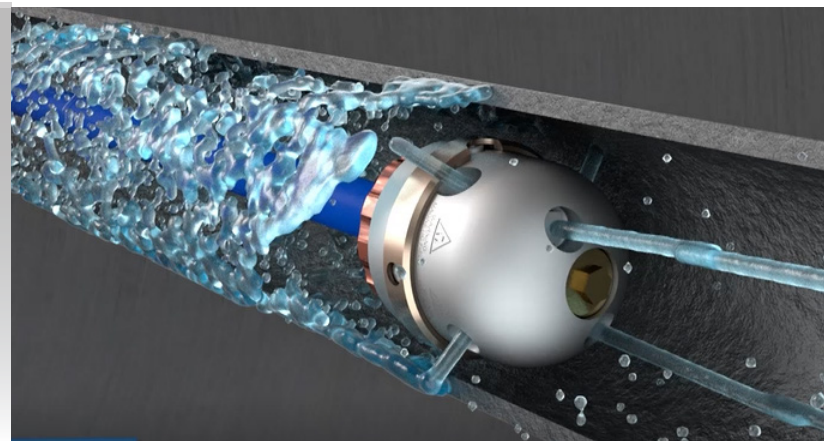

832.590.1300
sales@waterblast.com



www.waterblast.com



4133 Southerland Rd.
Houston, TX 77092